SSL Report: www.ikm.gov.in (164.100.197.137)

Assessed on: Sun, 25 Oct 2026 09:30:25 UTC | **HIDDEN** | Clear cache

Scan Another »

Summary

Overall Rating

F

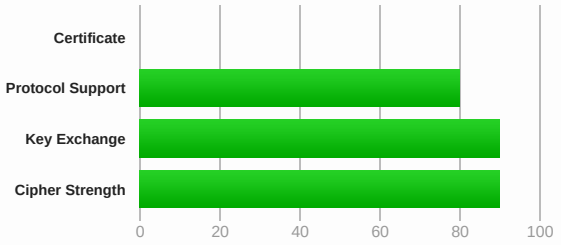

Visit our documentation page for more information, configuration guides, and books. Known issues are documented here.

This server's certificate is not trusted, see below for details.

This server does not support TLS 1.3. MORE INFO »

This site works only in browsers with SNI support.

This server does not support PQC (Post-Quantum Cryptography) key exchange.

DNS Certification Authority Authorization (CAA) Policy found for this domain. MORE INFO »

Certificate #1: RSA 2048 bits (SHA384withRSA)

Server Key and Certificate #1

Subject	*.ikm.gov.in Fingerprint SHA256: ed8ce2d944c50e611c77eaf5eef3bee834b0d09d5d85ee12f774c271bfe91454 Pin SHA256: GqvCML5TwVzarrRz9Oh3ikodn49z29xY2SdzFN8Mx38=
Common names	*.ikm.gov.in
Alternative names	ikm.gov.in *.ikm.gov.in
Serial Number	179c53346cb33284351730df6f8845
Valid from	Tue, 06 Oct 2026 12:23:21 UTC
Valid until	Mon, 04 Jan 2027 12:23:21 UTC (expires in 2 months and 10 days)
Key	RSA 2048 bits (e 65537)
Weak key (Debian)	No
Issuer	EM OV TLS CA - G2A-1 AIA: http://repository.emsign.com/certs/EMOVTLSCAG2A1EE.p7c
Signature algorithm	SHA384withRSA
Extended Validation	No
Certificate Transparency	**Yes (certificate)**
OCSP Must Staple	No
Revocation information	CRL, OCSP CRL: http://crl.emsign.com?EMOVTLSCAG2A1.crl OCSP: http://ocsp-a.emsign.com
Revocation status	Revoked **INSECURE**

Server Key and Certificate #1

DNS CAA	Yes policy host: ikm.gov.in issuewild: emsign.com flags:0
Trusted	No **NOT TRUSTED** (Why?) **Mozilla Apple Android Java Windows**

Additional Certificates (if supplied)

Certificates provided	4 (6051 bytes)
Chain issues	Contains anchor

#2

Subject	EM OV TLS CA - G2A-1 Fingerprint SHA256: 291804ec866837cd5af5f4d652f1dcc79bec622d4f9bf4870e5e4d8639df3ad4 Pin SHA256: jHhw1+HFXQ8G1320mEPvrwFzcbfij0pxJB/xdG8Epfw=
Valid until	Mon, 28 May 2040 07:23:41 UTC (expires in 13 years and 7 months)
Key	RSA 4096 bits (e 65537)
Issuer	emSign Root TLS CA - G1
Signature algorithm	SHA384withRSA

#3

Subject	emSign Root TLS CA - G1 Fingerprint SHA256: 9b913476eab476e21e0887dbcde44345d1359d28116b83b7cd3e87bd807ebf68 Pin SHA256: 7OKONSic6GIcckB5SeUFAFKtRgfMMy6vm1RgKarL+3o=
Valid until	Sat, 09 Jul 2039 18:30:00 UTC (expires in 12 years and 8 months)
Key	RSA 4096 bits (e 65537)
Issuer	emSign Root CA - G1
Signature algorithm	SHA256withRSA

#4

Subject	emSign Root CA - G1 In trust store Fingerprint SHA256: 40f6af0346a99aa1cd1d555a4e9cce62c7f9634603ee406615833dc8c8d00367 Pin SHA256: N2oacIKlk9zMINVh0Rnpq40w8RzDIdCjf6QfDfKE4Bw=
Valid until	Wed, 18 Feb 2043 18:30:00 UTC (expires in 16 years and 3 months)
Key	RSA 2048 bits (e 65537)
Issuer	emSign Root CA - G1 Self-signed
Signature algorithm	SHA256withRSA

Certification Paths

Click here to expand

Certificate #2: RSA 2048 bits (SHA384withRSA) No SNI

Click here to expand

Configuration

Protocols

TLS 1.3	No
TLS 1.2	Yes*
TLS 1.1	No

Protocols

TLS 1.0	No
SSL 3	No
SSL 2	No

(*) Experimental: Server negotiated using No-SNI

Cipher Suites

TLS 1.2 (suites in server-preferred order)

TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (0xc030)	ECDH secp256r1 (eq. 3072 bits RSA) FS	256
TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (0xc02f)	ECDH secp256r1 (eq. 3072 bits RSA) FS	128
TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (0x9f)	DH 4096 bits FS	256
TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (0x9e)	DH 4096 bits FS	128
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384 (0xc028)	ECDH secp256r1 (eq. 3072 bits RSA) FS **WEAK**	256
TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (0xc014)	ECDH secp256r1 (eq. 3072 bits RSA) FS **WEAK**	256
TLS_DHE_RSA_WITH_AES_256_CBC_SHA256 (0x6b)	DH 4096 bits FS **WEAK**	256
TLS_DHE_RSA_WITH_AES_256_CBC_SHA (0x39)	DH 4096 bits FS **WEAK**	256

Handshake Simulation

Android 4.4.2	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Android 5.0.0	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	ECDH secp256r1 FS
Android 6.0	RSA 2048 (SHA384)	TLS 1.2 > http/1.1	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	ECDH secp256r1 FS
Android 7.0	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Android 8.0	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Android 8.1	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Android 9.0	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
BingPreview Jan 2015	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Chrome 49 / XP SP3	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	ECDH secp256r1 FS
Chrome 69 / Win 7 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Chrome 70 / Win 10	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Chrome 80 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Chrome 131 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Firefox 31.3.0 ESR / Win 7	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	ECDH secp256r1 FS
Firefox 47 / Win 7 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	ECDH secp256r1 FS
Firefox 49 / XP SP3	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Firefox 62 / Win 7 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Firefox 73 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Firefox 135 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Googlebot Feb 2018	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
IE 11 / Win 7 R	RSA 2048 (SHA384)	TLS 1.2	TLS_DHE_RSA_WITH_AES_256_GCM_SHA384	DH 4096 FS
IE 11 / Win 8.1 R	RSA 2048 (SHA384)	TLS 1.2 > http/1.1	TLS_DHE_RSA_WITH_AES_256_GCM_SHA384	DH 4096 FS
IE 11 / Win Phone 8.1 R	RSA 2048 (SHA384)	TLS 1.2 > http/1.1	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA	ECDH secp256r1 FS
IE 11 / Win Phone 8.1 Update R	RSA 2048 (SHA384)	TLS 1.2 > http/1.1	TLS_DHE_RSA_WITH_AES_256_GCM_SHA384	DH 4096 FS
IE 11 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Edge 15 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Edge 16 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Edge 18 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Edge 131 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Edge 13 / Win Phone 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Java 8u161	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Java 11.0.3	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Java 12.0.1	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS

Handshake Simulation

OpenSSL 1.0.1l R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
OpenSSL 1.0.2s R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
OpenSSL 1.1.0k R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
OpenSSL 1.1.1c R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Opera 117 / Win 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 6 / iOS 6.0.1	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	ECDH secp256r1 FS
Safari 7 / iOS 7.1 R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	ECDH secp256r1 FS
Safari 7 / OS X 10.9 R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	ECDH secp256r1 FS
Safari 8 / iOS 8.4 R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	ECDH secp256r1 FS
Safari 8 / OS X 10.10 R	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384	ECDH secp256r1 FS
Safari 9 / iOS 9 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 9 / OS X 10.11 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 10 / iOS 10 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 10 / OS X 10.12 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 12.1.2 / MacOS 10.14.6 Beta R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Safari 12.1.1 / iOS 12.3.1 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Apple ATS 9 / iOS 9 R	RSA 2048 (SHA384)	TLS 1.2 > h2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
Yahoo Slurp Jan 2015	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS
YandexBot Jan 2015	RSA 2048 (SHA384)	TLS 1.2	TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384	ECDH secp256r1 FS

 # Not simulated clients (Protocol mismatch)

Click here to expand

(1) Clients that do not support Forward Secrecy (FS) are excluded when determining support for it.
(2) No support for virtual SSL hosting (SNI). Connects to the default site if the server uses SNI.
(3) Only first connection attempt simulated. Browsers sometimes retry with a lower protocol version.
(R) Denotes a reference browser or client, with which we expect better effective security.
(All) We use defaults, but some platforms do not use their best protocols and features (e.g., Java 6 & 7, older IE).
(All) Certificate trust is not checked in handshake simulation, we only perform TLS handshake.

Protocol Details

Secure Renegotiation	**Supported**
Secure Client-Initiated Renegotiation	No
Insecure Client-Initiated Renegotiation	No
BEAST attack	Mitigated server-side (more info)
POODLE (SSLv3)	No, SSL 3 not supported (more info)
POODLE (TLS)	No (more info)
Zombie POODLE	No (more info) TLS 1.2 : 0xc014
GOLDENDOODLE	No (more info) TLS 1.2 : 0xc014
OpenSSL 0-Length	No (more info) TLS 1.2 : 0xc014
Sleeping POODLE	No (more info) TLS 1.2 : 0xc014
Downgrade attack prevention	Unknown (requires support for at least two protocols, excl. SSL2)
SSL/TLS compression	No
RC4	No
Heartbeat (extension)	Yes
Heartbleed (vulnerability)	No (more info)
Ticketbleed (vulnerability)	No (more info)
OpenSSL CCS vuln. (CVE-2014-0224)	No (more info)
OpenSSL Padding Oracle vuln. (CVE-2016-2107)	No (more info)
ROBOT (vulnerability)	No (more info)
Forward Secrecy	**Yes (with most browsers) ROBUST** (more info)
ALPN	Yes h2 http/1.1

Protocol Details

NPN	Yes h2 http/1.1
Session resumption (caching)	**No (IDs assigned but not accepted)**
Session resumption (tickets)	Yes
OCSP stapling	No
Strict Transport Security (HSTS)	No
HSTS Preloading	**Not in: Chrome Edge Firefox IE**
Public Key Pinning (HPKP)	No (more info)
Public Key Pinning Report-Only	No
Public Key Pinning (Static)	No (more info)
Long handshake intolerance	No
TLS extension intolerance	No
TLS version intolerance	No
Incorrect SNI alerts	No
Uses common DH primes	No
DH public server param (Ys) reuse	No
ECDH public server param reuse	No
Supported Named Groups	secp256r1
PQC Key Exchange	Not Supported
Supported PQC Groups	-
SSL 2 handshake compatibility	Yes

HTTP Requests

1 **https://www.ikm.gov.in/** (HTTP/1.1 400 Bad Request)

Miscellaneous

Test date	Sun, 25 Oct 2026 09:28:25 UTC
Test duration	120.285 seconds
HTTP status code	400
HTTP server signature	nginx
Server hostname	-

Why is my certificate not trusted?

There are many reasons why a certificate may not be trusted. The exact problem is indicated on the report card in bright red. The problems fall into three categories:

1. Invalid certificate
2. Invalid configuration
3. Unknown Certificate Authority

1. Invalid certificate

A certificate is invalid if:

- It is used before its activation date
- It is used after its expiry date
- Certificate hostnames don't match the site hostname
- It has been revoked
- It has insecure signature
- It has been blacklisted

2. Invalid configuration

In some cases, the certificate chain does not contain all the necessary certificates to connect the web server certificate to one of the root certificates in our trust store. Less commonly, one of the certificates in the chain (other than the web server certificate) will have expired, and that invalidates the entire chain.

3. Unknown Certificate Authority

In order for trust to be established, we must have the root certificate of the signing Certificate Authority in our trust store. SSL Labs does not maintain its own trust store; instead we use the store maintained by Mozilla.

If we mark a web site as not trusted, that means that the average web user's browser will not trust it either. For certain special groups of users, such web sites can still be secure. For example, if you can securely verify that a self-signed web site is operated by a person you trust, then you can trust that self-signed web site too. Or, if you work for an organisation that manages its own trust, and you have their own root certificate already embedded in your browser. Such special cases do not work for the general public, however, and this is what we indicate on our report card.

4. Interoperability issues

In some rare cases trust cannot be established because of interoperability issues between our code and the code or configuration running on the server. We manually review such cases, but if you encounter such an issue please feel free to contact us. Such problems are very difficult to troubleshoot and you may be able to provide us with information that might help us determine the root cause.

SSL Report v2.4.3

Copyright © 2009-2026 Qualys, Inc. All Rights Reserved. Privacy Policy. Terms and Conditions

Try Qualys for free! Experience the award-winning Qualys Cloud Platform and the entire collection of Qualys Cloud Apps, including certificate security solutions.